


Technical Specification


<b>Model no.</b>	<b>eco-BIPV-121-28/6M-1.67/0.95-10/10-FT</b>
<b>Length</b>	<b>1675mm</b>
<b>Width</b>	<b>950mm</b>
<b>Glass thickness</b>	<b>10mm + 10mm</b>
<b>Glass type</b>	<b>Fully tempered</b>
<b>No. of cell</b>	<b>28</b>
<b>Type of cell</b>	<b>156x156mm mono</b>
<b>Power output#</b>	<b>121Wp</b>
<b>Voc</b>	<b>19.94V</b>
<b>Isc</b>	<b>8.598A</b>

# Under standard test conditions of irradiance of 1000W/m2, air mass of 1.5 and cell temperature of 25°C

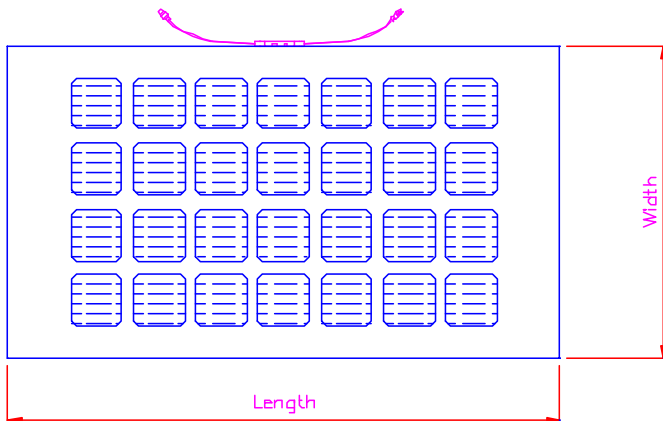

Model number designation:

eco-BIPV-121-28/6M-1.67/0.95-10/10-FT

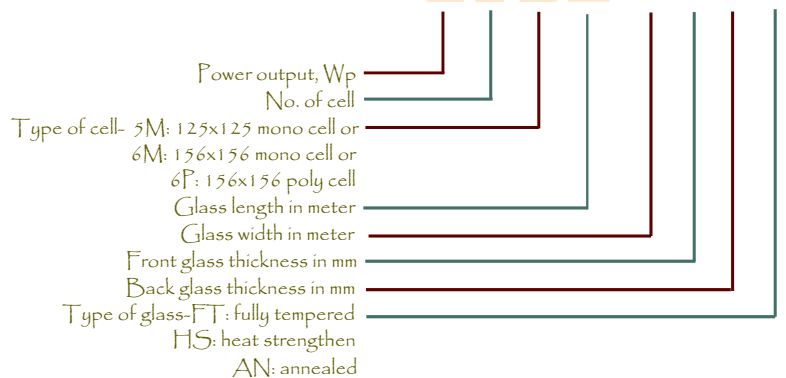

eco-BIPV

www.ecotech.com.hk